

SIP Strobe

Now supporting voice mailbox *Message Waiting Indication*

CyberData

The IP Endpoint Company

When installed, the wall-mounted SIP Strobe operates as a visual alerting device. The device can be set up as part of a ring group (call group) with the Strobe engaged as notification of incoming calls.

The SIP Strobe may also be activated by being part of a Multicast group. When audio is detected on a specific Multicast address and port, the strobe will activate.

Through a web page setup, you can have the SIP Strobe respond to message waiting signals by blinking. When the message has been heard, the strobe stops blinking.

User selectable scenes for blink rate and brightness for each of the activation modes.

Users may also use CyberData's HTTP command set to directly access the strobe's functions.

Features

- 5 user blink scenes available
- User configurable brightness
- Meets ADA requirements for telephony signaling and notification
- Program or listen to up to 10 multicast addresses
- SIP activation
- Mailbox Message Waiting Indication
- Multicast activation
- Cisco SRST support
- Event-controlled relay
- Tamper sensor
- Web-based setup
- PoE-powered

Use areas include:

- Sales and support mailbox indication
- Classrooms
- Banks or financial institutions
- Court rooms
- Manufacturing warehouses
- Office
- Indoor only




Specifications

Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Power Input	PoE 802.3af compliant or +12 to 24 VDC at 1000 mA (500 mA minimum)
Light power	Up to 90 candela (user-selectable)
Flash rate	5 user-defined scenes
LED MTBF	100,000 Hours
Operating Temperature	-10° C to 50° C (14° F to 122° F)
Regulatory Compliance	FCC Class A, UL 60950
Dimensions	5" x 5" x 1.5" (H x W x D)
Warranty	2 years limited
Part Number	011087

CyberData

The IP Endpoint Company

SIP Strobe

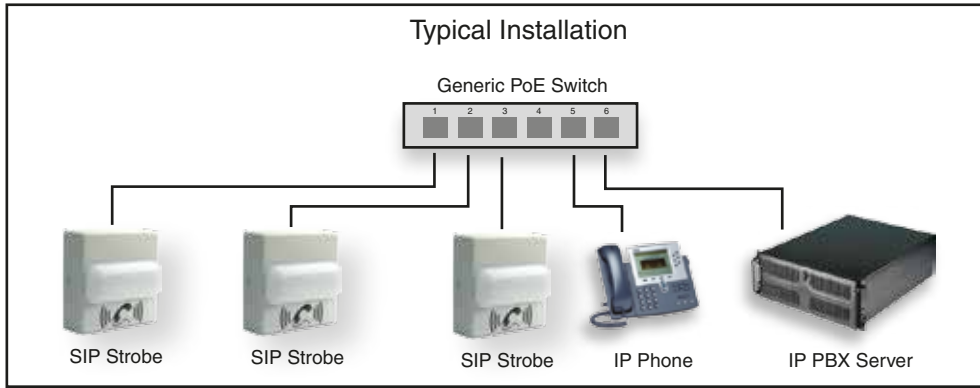

Mounting Options

